

Technaxx® user manual

Mini Wireless Microphone TX-301

Before using the appliance for the first time, please read the instructions for use and safety information carefully.

Keep this user manual for future reference or product sharing carefully. Do the same with the original accessories for this product. In case of warranty, please contact the dealer or the store where you bought this product.

Features

- Wireless microphones for best sound captioning
- Noise reduction
- Hanging clip at microphones
- Charging case for extended use and storage
- Plug and play – works without an app

Declaration of Conformity

The EU Declaration of Conformity can be requested at the following address: www.technaxx.de/ (in the lower bar "Declaration of Conformity").

Disposal

Disposal of the packaging. Sort packaging materials by type upon disposal. Dispose of cardboard and paperboard in the waste paper. Foils should be submitted for recyclables collection.


Disposing of old equipment (Applies in the European Union and other European countries with separate collection (collection of recyclable materials) Old equipment must not be disposed of with household waste! Every consumer is required by law to dispose of old devices that can no longer be used separately from household waste, e.g. at a collection point in his or her municipality or district. This ensures that the old devices are properly recycled and that negative effects on the environment are avoided. For this reason, electrical devices are marked with the symbol shown here.

Technical specification

Frequency / range / rate	2.4GHz / 20Hz-20KHz / 32KHz
Transmitting distance	About 15m
Latency	30ms
SNR	64dB (3 level)
Sensitivity	38 dB
Battery capacity microphone	70 mAh / 3.7 V
Battery capacity case	600 mAh / 3.7 V
Charging input	DC 5 V / 2 A (USB Type C port)
Charging time	Approx. 1.5 h
Recharging times	4 times
Working time	Approx. 6h
Working temperature	0-50°C
Material	ABS
Weight / Dimension Microphone	8.3g / 47 x 17.5 x 16.5 mm

Weight / Dimension Receiver	4.9g / 41 x 26.6 x 10 mm
Weight / Dimension Case	64g / 90 x 62 x 31 mm
Package content	USB-C Microphone receiver unit, 2x microphone unit, charging case, charging cable, user manual


Product Overview

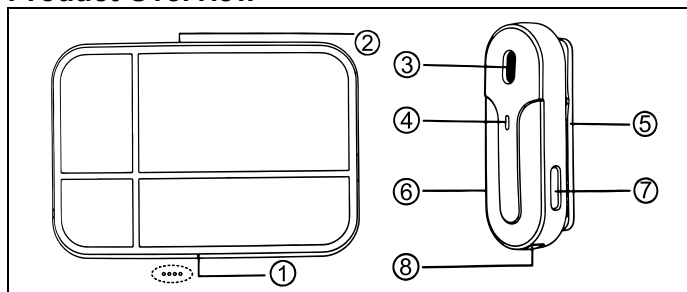

1	Battery indicator light of the case (inside)	2	Type-C charging port
3	Microphone hole	4	Indicator light of microphone
5	Clip	6	Microphone power button
7	Microphone charging port (Type-C)	8	Metal pin surface for case charging

Receiver

- Type-C plug
- Type-C charging port (for phone during use)
- Indicator light



First use

Open the charging case and take out the microphone(s). The indicator LED flashes red and green. Connect the Type-C receiver to your smartphone or tablet. Pairing is successful when the red light on the receiver and the green light on the microphone are solid. Open the camera app or voice recorder to use the microphones to record sound.

LED status indicator and button control

- Paired – indicator light on the receiver is red. Green light on the microphone is always on.
- Searching for receiver – green and red lights flash alternately.
- Noise reduction level – press the power button (6) to toggle between the 3 levels. (light flashes accordingly - 1: low / 2: medium / 3: high)
- Mute – Double click the power button on the microphone (6) to mute the unit, green light flashes.
- Add reverb to recording – Press the power button (6) three times in a row.
- Low battery – The indicator light (4) flashes red every 10s.

Note: If the indicator light on the receiver (3) does not light up, check whether the "OTG" (On-the-Go) setting is activated on your smartphone / tablet.

Charging

- Plug the supplied USB cable into a power adapter (DC 5V/2A, unplugged) and the other end into the TYPE-C charging interface of the case (2) or microphone (7) to charge.
- The four indicator lights (1) of the charging box will light up during charging, after fully charged, the indicator lights will be solid.
- The indicator light of the microphone will go out after fully charged.

NOTE: The microphone will automatically shut down after 3 minutes of no connection. The wireless lavalier microphone does not support phone calls and online chatting. No connection between different models possible.

CAUTION

- Do not exceed the product to loud volumes.
- Do not invade water or other liquids.
- Keep children away from the device.
- Keep away from flammable and explosive materials.
- Do not throw in fire – it will explode due to the built-in battery.

Safety instructions

• Observe the safety instructions during use. • Any modification or alteration of the product will affect the safety of the product. Caution risk of injury! • All changes and repairs to the product or its accessories may only be carried out by the manufacturer or by persons expressly authorized by the manufacturer. • Never open the product without authorization. • Never carry out repairs yourself! • Handle the product with care. It can be damaged by shaking or falling from a small height. • Never immerse the product in water or other liquids. • Technical changes and errors reserved.

Support

Service phone No. for technical support: **01805 012643**
(14 cent/minute from German fixed-line and 42 cent/minute from mobile networks). Free Email: support@technaxx.de
The support hotline is available Mon-Fri from 9 am to 1 pm & 2 pm to 5 pm.

Cleaning and maintenance

• Clean the equipment regularly with a moist cloth. Do not use cleaning agents or solvents. • Ensure that no water can seep into the plugs. The ingress of water into an electric device increases the risk of an electric shock or damage of the device.

Made in China

Distributed by:
Technaxx Deutschland GmbH & Co. KG
Konrad-Zuse-Ring 16-18,
61137 Schöneck, Germany